

A Series High Range Stand-on Pallet Stacker With Mast Move

Distinguishing marks	HANGCHA GROUP CO.,LTD.			
	1.1	Manufacturer	CDD12-AC1S-M	CDD16-AC1S-M
1.2	Manufacturer's type designation	CDD12-AZ3S-M	CDD16-AZ3S-M	
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Electric	Electric	
1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Standing	Standing	
1.5	Rated capacity/rated load	Q(kg)	1200	
1.6	Load centre distance	c(mm)	500	
1.8	Load distance, centre of load axle to fork	x (mm)	450	
1.9	Wheelbase	y (mm)	1341	
Weight	2.1	Service weight	kg	1800
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	Polyurethane	Polyurethane
	3.2	Tyre size, front	mm	φ230×75
3.3	Tyre size, rear	mm	φ210×85	
3.4	Tyre size, Additional wheel	mm	φ125×50	
3.5	Wheels, number front/rear(≠driven wheels)		1×+2/2	
3.6	Tread, front	b10 (mm)	497	
3.7	Tread, rear	b11 (mm)	981	
Dimensions	4.1	Tilt of fork carriage forward/backward	α/β(°)	3/5
	4.2	Height, mast lowered	h1 (mm)	1930
	4.4	Lift	h3 (mm)	2700
	4.5	Height, mast extended	h4 (mm)	3655
	4.8	Stand height	h7(mm)	170
	4.10	Height of wheel arms	h8 (mm)	226
	4.19	Overall length	l1 (mm)	2202
	4.20	Length to face of forks	l2 (mm)	1132
	4.21	Overall width	b1/b2(mm)	1040/1074
	4.22	Fork dimensions	s/e/l (mm)	35/100/1070
	4.24	Fork-carriage width	b3(mm)	902
	4.25	Distance between fork-arms	bs (mm)	200-750
	4.26	Distance between wheel arms	b4(mm)	772
	4.28	Reach distance	l4(mm)	590
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	55
4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	2617	
4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	2654	
4.35	Turning radius	Wa (mm)	1600	
4.37	Length across wheel arms	l7(mm)	1704	
Performance data	5.1	Travel speed, laden/unladen	km/h	5.5/6.0
	5.2	Lift speed, laden/unladen	m/s	0.140/0.200
	5.3	Lowering speed, laden/unladen	m/s	0.190/0.155
	5.4	Reaching speed, laden/unladen	m/s	0.100/0.100
	5.8	Max.gradeability, laden/unladen	%	6/10
5.10	Service brake		Electromagnetic braking	
Electric-engine data	6.1	Drive motor rating S2 60 min	kW	1.5
	6.2	Lift motor rating at S3 15%	kW	3
	6.4	Battery voltage/nominal capacity K5	V/Ah	24/280
	6.5	Battery weight	kg	280
Addition data	8.1	Type of drive control		AC CURTIS
	10.5	Steering design		AC ZAPI


1.2t/1.6t Mast specification

Type	Fork lift height h3	Mast lowered h1	Mast extended h4	Free lift height	Capacity	
					Load capacity at 500mm	
Wide view mast	mm	mm	mm	mm	1.2t	1.6t
	2000	1580	2955	0	1200	1600
	2500	1830	3455	0	1200	1600
	2700	1930	3655	0	1200	1600
	3000	2080	3955	0	1200	1500
	3300	2230	4255	0	1200	1400
	3500	2330	4455	0	1150	1350
	3600	2380	4555	0	1150	1350
	3700	2430	4655	0	1100	1300
	3800	2480	4755	0	1100	1300
Wide view full free triplex mast	4000	2680	4955	0	1050	1250
	4300	2830	5255	0	1000	1200
	4500	2930	5455	0	950	1150
	3500	1875	4455	920	1150	1350
	3700	1940	4655	985	1100	1300
	4000	2040	4955	1085	1050	1250
	4300	2140	5255	1185	1000	1200
	4500	2190	5455	1235	950	1150
	4700	2290	5655	1335	900	1100
	5000	2390	5965	1435	850	1050
5200	2440	6155	1485	800	1000	
5500	2540	6455	1585	750	950	



A Series High Range Stand-on Pallet Stacker With Mast Move

with capacities of 1,200 to 1,600kg

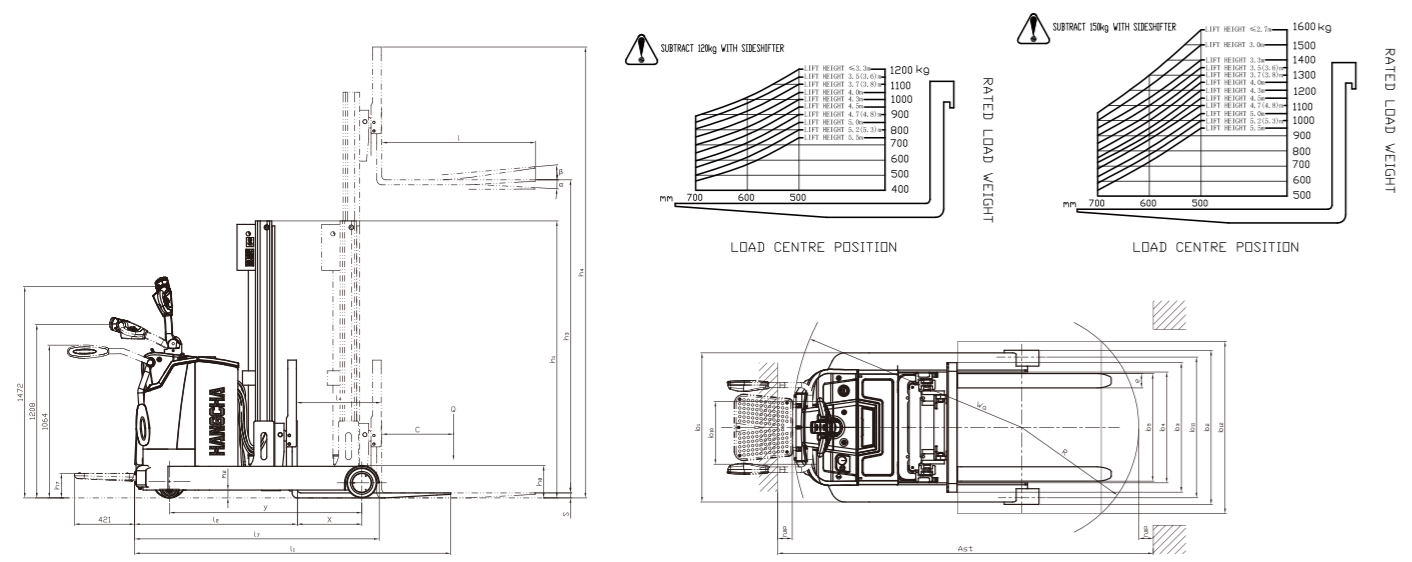

ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: No. 88, Donghuan Rd., Lin'an Economic Development Zone, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88132890 88926789

sales@hcforklift.com
www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

The World of Hangcha



A Series High Range Stand-on Pallet Stacker With Mast Move

The truck combines benefits of regular stacker and counterbalanced stacker. It can be used for non-standard pallets, enclosed pallets, and enclosed shelves. The mast can be retracted into truck body, which reduces passage width required for operation significantly, and the stacker is an ideal vehicle for operation in narrow passage. Cutting-edge AC control technology applied for the truck offers excellent performance, comfortable operation, safety and reliability, and low maintenance cost.

Easy/ Efficiency/ Economy



High Performance

- / EPS(Electric Power Steering) is standard specification, which provides flexible operation.
- / Pump motor realize proportional control all operation of fork by the controller, thus more accurate fork operation.
- / The AC driving motor features excellent acceleration performance, outstanding climbing ability, low heat emission, and is brushless, and maintenance-free.
- / The latest CURTIS AC / ZAPI AC control system realizes accurate, stable, and efficient control.
- / Regenerative brake of the truck prevents it from sliding on a slope.
- / Switches, plug connectors, meters, and other important parts are all imported from abroad, with excellent performance and reliable quality.
- / Standard featured fork tilting and load backrest realize safer loading and unloading of goods.
- / The hydraulic power unit features low noise, small vibration, and stable and reliable lifting and lowering.

Reliability

- / Four-pivots and low-gravity-center design and the high-strength steel plate framed structure feature large residual load capacity, and long service life.
- / All plug connectors are imported and waterproof, and all cables have reliable protection, which increases reliability of electrical system significantly.
- / Non-contact proximity switch features long service life and reliable operation.
- / The mast is made of H-shaped steel channels, which offer better rigidity and stability in comparison with C-shaped channels.
- / Reach track of mast is made of high-strength steel channels, with longer service life.
- / Power plug is fastened to truck body, which can avoid damage of plug due to impact when battery is lifted for installation.
- / Flexible connections of the battery can avoid disconnection fault of battery because of lasting vibration.

Maintenance

- / The brushless, maintenance-free AC driving motor reduces operation cost significantly.
- / The meter integrating battery indicator, timer, and fault self-diagnosis is convenient for maintenance.
- / Back cover can be opened fully, and all components and parts are clear at a glance, which is very convenient for maintenance of the entire machine.

Safety

- / Traveling speed will be automatically reduced after fork lifting 500mm.
- / Turning speed is automatically reduced when steering.
- / The integrated stamping molded guardrail offers better protection for the operator.
- / Release braking, reverse braking and emergency braking can ensure safety of traveling.
- / Anti-sliding function on slope can ensure safety of operation.
- / The belly button on top of operating handle can avoid the driver from injury effectively.
- / The soft landing system reduces lowering speed automatically when height from ground to fork is less than 100mm, which provides effective protection for goods.

Comfort

- / The vibration-reduction design of the pedal reduces fatigue of long-duration operation.
- / Operating tiller has beautiful appearance, and function buttons for comfortable operation.
- / The standard configuration of tortoise speed driving function allows the truck to move at slow speed more easily.
- / Optimized mast structure design offers excellent field of view for operations, which is easy for access and exit pallet.

Options

- / Mast height: 2000-4500mm for duplex mast, 3500-5500mm for triplex mast
- / Various fork lengths
- / Sideshift move LH/RH ±100mm



Standard specification

- / AC driving motor
- / CURTIS AC / ZAPI AC controller
- / Controller for pump motor
- / EPS (Electric Power Steering) system
- / Automatic deceleration at turns
- / Proportional speed regulation for all fork operations
- / Pedal and guardrail
- / Emergency power off switch
- / Multi-function battery condition meter
- / High-performance loading wheels, additional wheels
- / Fork length 1070mm
- / Adjustable outer distance of forks within the range of 200-750mm
- / Fork tilt forward / backward: 3° / 5°
- / Load backrest
- / 2.7m duplex mast with double lifting cylinders
- / Soft landing system
- / Multi-function tiller
- / Traveling speed will be automatically reduced after fork lifting 500mm
- / Reach distance of fork: 590mm
- / Battery capacity: 280Ah for 1.2t model, 340Ah for 1.6t model



Fork tilt F/R: 3° / 5°



EPS (Electric Power Steering) is standard specification



Cover can be opened fully



Multi-function tiller